

# Eastman Solus™ 2100 performance additive

## Weathering update — 31-month exposure

Eastman Solus™ 2100 performance additive was tested after 31 months of weathering durability exposure in Florida. Derived from natural and renewable cellulose material, Solus 2100 is designed for today's high-solids topcoat systems, featuring improved productivity from reduced dry-to-touch times and extended polishing window while maintaining the excellent sag behavior for which Eastman cellulose esters are known.

Two generic topcoat formulations, found in Table 1, were prepared where Solus 2100 was substituted for 10 wt% of the polyol resin. In the generic formulations containing Solus 2100, formulation 1 contains a blend of acrylic resins, whereas formulation #2 contains only one of the polyol resins. The coatings were applied over e-coated, cold-roll steel panels coated with a commercially available sealer and base coat.

**Table 1. Generic test formulations**

Material	Supplier	Eastman Solus 2100 Formulation 1, wt% in grams	Eastman Solus 2100 Formulation 2, wt% in grams
Part A			
Setalux® 1903 BA75	Nuplex Resins	16.2	54.0
Macrynal® 515/70 BAC	Allnex	40.5	—
Eastman Solus™ 2100 performance additive (50% in solvent blend)	Eastman	9.0	9.0
Irganox® 1010 (10% solids)	BASF	1.0	1.0
DBTDL (10% solids)	—	0.5	0.5
Tinuvin® 1130 (10% solids)	BASF	4.5	4.5
Tinuvin® 123 (10% solids)	BASF	6.8	6.8
BYK-331	BYK Chemie	1.0	1.0
Solvent blend <sup>a</sup>	—	—	0.9
Part B			
Tolonate™ HDT-LV (100%)	Vencorex	22.3	22.3
<b>Total</b>		<b>101.8</b>	<b>100.0</b>

Reduce above formulation to 18 sec on No. 4 Ford cup using 8.8 g of the solvent blend.


% solids of both formulations before thinning = 70

% solids of both formulations after thinning = 64

<sup>a</sup>Solvent blend = n-butyl acetate 45, MAK 35, MEK 15


Figure 1 depicts the 20° gloss and % gloss retention after 31 months of Florida exposure. The performance of formulation 2 is very similar to that of a readily available commercial clear coat.

**Figure 1.**

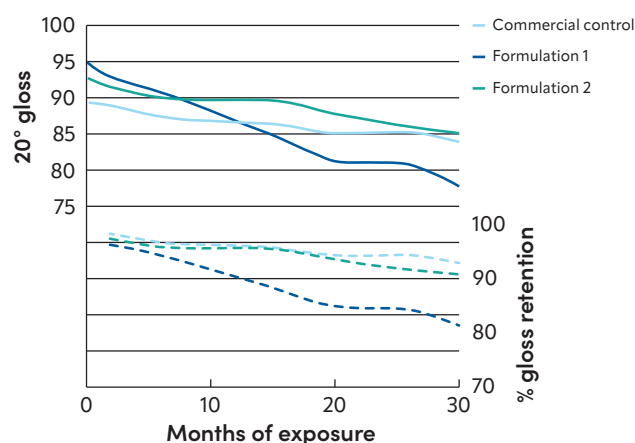

The changes in Delta E over the first 26 months were reasonably equivalent as shown in Figure 2.

**Figure 2.**

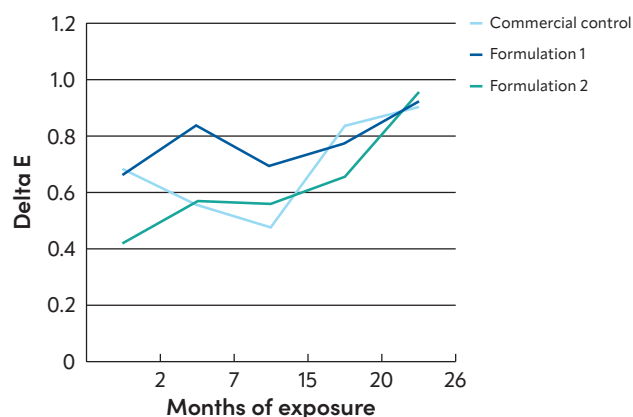

The Solus family of performance additives provides the same UV resistance commonly found in traditional Eastman cellulose ester products.

As the world's leading supplier of specialty cellulose esters for over 85 years, Eastman has a long history of reliably supplying customers with consistently high-quality products manufactured using advanced processes and controls. With a diverse portfolio of Eastman Solus™ performance additives, for a variety of applications along with years of formulating experience, our technical experts can provide guidance to help customers select the best cellulose ester or blend to achieve the specific performance desired for their unique application. Over the years, we've introduced innovative products that help meet customer needs and market demands. Eastman works with regulatory agencies and industry associations on behalf of our customers to advocate for policies that allow industries to thrive, enabling sustainable innovation. At Eastman, our goal is to enhance the quality of life in a material way.

## **EASTMAN**

### **Eastman Corporate Headquarters**

P.O. Box 431  
Kingsport, TN 37662-5280 U.S.A.

U.S.A. and Canada, 800-EASTMAN (800-327-8626)  
Other locations, +(1) 423-229-2000

[eastman.com/locations](http://eastman.com/locations)

Although the information and recommendations set forth herein are presented in good faith, Eastman Chemical Company ("Eastman") and its subsidiaries make no representations or warranties as to the completeness or accuracy thereof. You must make your own determination of its suitability and completeness for your own use, for the protection of the environment, and for the health and safety of your employees and purchasers of your products. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment, or formulation in conflict with any patent, and we make no representations or warranties, express or implied, that the use thereof will not infringe any patent. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS AND NOTHING HEREIN WAIVES ANY OF THE SELLER'S CONDITIONS OF SALE.

Safety Data Sheets providing safety precautions that should be observed when handling and storing our products are available online or by request. You should obtain and review available material safety information before handling our products. If any materials mentioned are not our products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be observed.

© 2023 Eastman. Eastman brands referenced herein are trademarks of Eastman or one of its subsidiaries or are being used under license. Non-Eastman brands referenced herein are trademarks of their respective owners.