



# Medium-temperature

heat transfer fluids for the EMEA region

**Proven** solutions. **Precise** temperature control. **Peace of mind.**  
*Stay up and running with innovative solutions for mid-temperature ranges.*

**THERMINOL**  
Heat Transfer Fluids by Eastman

**MARLOTHERM**  
Heat transfer fluids by Eastman

# The solution to trust when the heat is on you

Looking for a medium-temperature heat transfer fluid that safeguards system reliability and stability, and is an excellent alternative to mineral oils? Eastman's synthetic heat transfer fluids provide precise temperature control in a variety of applications. When used as directed, they provide years of trouble-free service with minimal downtime.

Available in various formulations and operating ranges, Therminol® and Marlotherm® heat transfer fluids provide incredible benefits—economy, efficient operation, and minimum maintenance. Our heat


transfer fluids are trusted to perform in complex systems across the globe, satisfying the operating needs of virtually every single- or multiple-station heat-using system. As the leading brand of high-performance fluids for precise temperature control, Eastman heat transfer fluids are coursing through more than 20,000 systems worldwide.

Our broad product family includes fluids specifically engineered for medium-temperature ranges, including:

## THERMINOL 54

Provides an excellent alternative to mineral oil-based fluids by capturing the highly desired performance and nonfouling attributes of synthetic fluids

Recommend bulk temperature: 280°C (540°F)

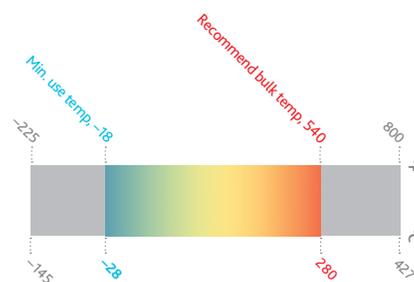


## THERMINOL SP

A unique, synthetic fluid designed to provide reliable, consistent heat transfer performance over a long life

Recommended bulk temperature: 300°C (575°F)

Max. extended use temperature: 315°C (600°F)

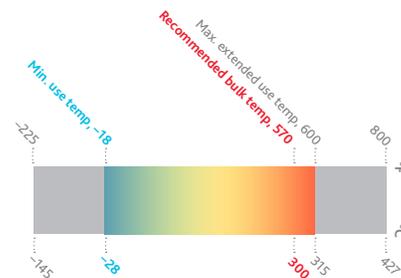


## MARLOTHERM SH

A synthetic heat transfer fluid that offers outstanding performance during both low-temperature start-ups and high-temperature operation

Recommended bulk temperature: 325°C (620°F)

Max. extended use temperature: 350°C (660°F)

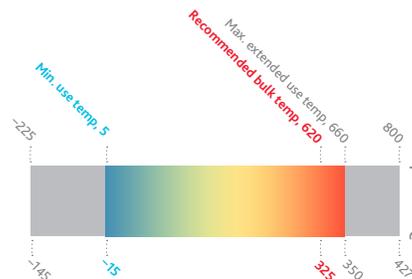

# Therminol and Marlotherm deliver the advantages of optimal fluid life.


## Avoid unnecessary downtime and work stoppages.

The generation of high solids can lead to unplanned downtime, pump seal replacements, and other maintenance and refill costs. The chemistry of Eastman heat transfer fluids prevents the formation of significant solids, which helps you avoid fouling, pump seal failures, and downtime.

## Superior oxidation stability enables less degradation and sludge buildup than mineral oils

### Product longevity: Oxidation test results

Sediment mass/fluid mass (ppm)

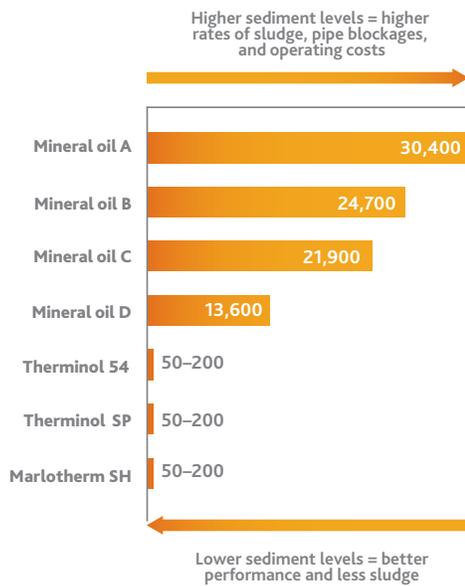

Mineral oil A



Mineral oil B



Therminol and Marlotherm



After testing 50-mL sample at 200°C for two 6-hour periods @ 100 mL/min airflow



As demonstrated by their greater clarity, Therminol and Marlotherm heat transfer fluids have less degradation and sludge buildup over time than mineral oil.


Compared to mineral oil, Therminol and Marlotherm in your system will result in less sediment mass, which translates to less sludge formation and pipe blockage.

## Lower total cost of ownership across fluid lifetime

Choosing the right fluid for the job can add up to true cost savings over the life cycle of the system. Simply put, less degradation means less fluid maintenance compared to mineral oil chemistry:

- Up to 50% reduction in costs over total life cycle of your system by eliminating the need for extra refills
- Less degradation helps minimize sludge formation
- Less wear on equipment
- As much as 55% lower fluid usage, eliminating the need for excessive top-ups

### Comparison of long-term operating costs

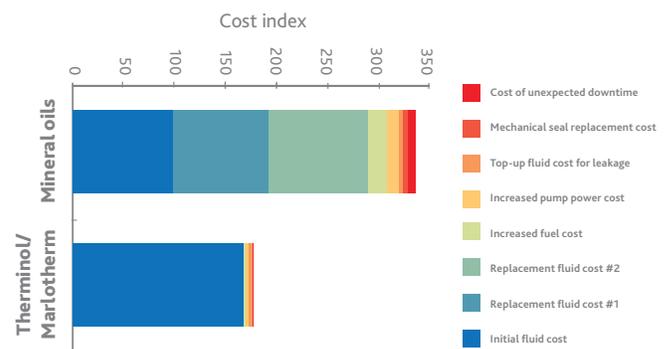


# How engineers and process managers keep their cool

Synthetic fluids last longer than mineral oils and perform more safely over time. Over years of usage, it is typical for a fluid's flash point to drop; so it is essential to consider how the flash point will change

over time. Significant drops can lead to fire risk. With flash points above 100°C, your system is safer with Therminol and Marlotherm.


**Therminol and Marlotherm samples: Flash point distribution**

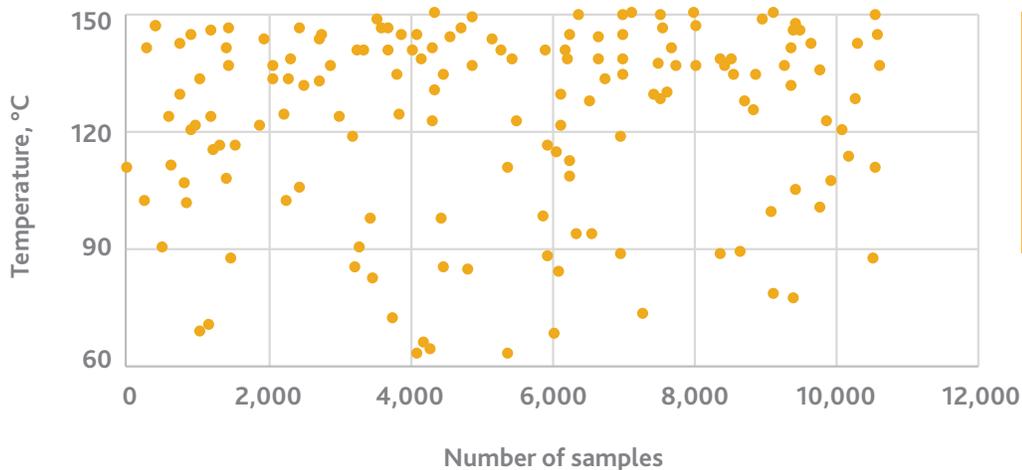

We measured 10,000 used samples of Therminol and Marlotherm and found only 1.5% of samples in which the flash point dropped below 150°C.

With the same analysis, we found that 12% of 5,500 used mineral oil samples had flash points that dropped as much—making it eight times more likely in a mineral oil system.

**Mineral oil samples: Flash point distribution**

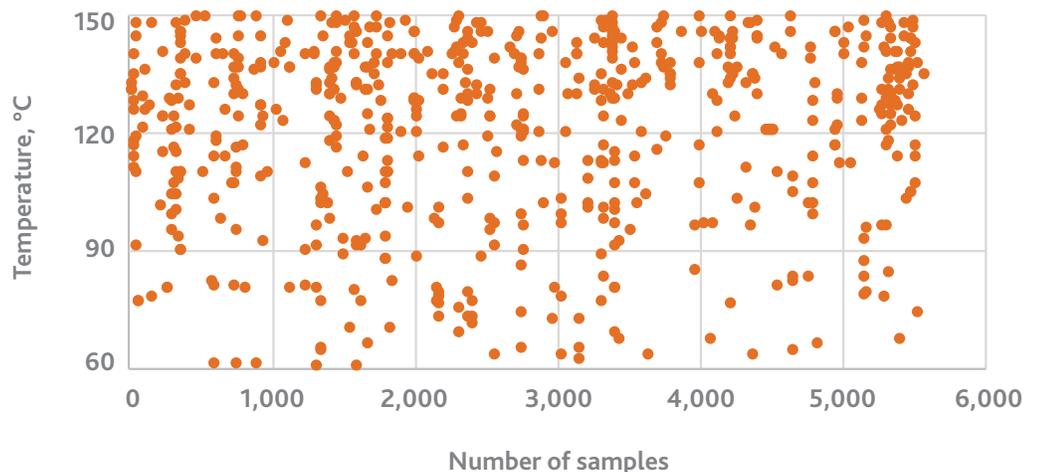

# Which Eastman heat transfer fluid fluid is right **for your system?**

## Operating temperature: 280°C

Fluid	Mineral oil	Therminol 54	Therminol SP	Marlotherm SH
High-boiler generation (%/year)	1.1	30% lower <sup>a</sup>	60% lower <sup>a</sup>	80% lower <sup>a</sup>
Resistance to degradation (%/year) <sup>b</sup>				
Time before replacement (years)				
Vent makeup (metric ton <sup>c</sup> /year)				
Average fluid use (metric ton <sup>c</sup> /year)	1.3	20% lower <sup>a</sup>	20% lower <sup>a</sup>	55% lower <sup>a</sup>

## Operating temperature: 300°C

Fluid	Mineral oil	Therminol SP	Marlotherm SH
High-boiler generation (%/year)	2.36	10% lower <sup>a</sup>	70% lower <sup>a</sup>
Resistance to degradation (%/year) <sup>b</sup>			
Time before replacement (years)			
Vent makeup (metric ton <sup>c</sup> /year)			
Average fluid use (metric ton <sup>c</sup> /year)	2.92	10% less	85% lower <sup>a</sup>

## Operating temperature: 320°C

Fluid	Mineral oil	Marlotherm SH
High-boiler generation (%/year)	7.53	68% lower <sup>a</sup>
Resistance to degradation (%/year) <sup>b</sup>		
Time before replacement (years)		
Vent makeup (metric ton <sup>c</sup> /year)		
Average fluid use (metric ton <sup>c</sup> /year)	20.3	95% lower <sup>a</sup>

<sup>a</sup> Data percentage as compared to the mineral oil value

<sup>b</sup> Thermal and oxidation resistance

<sup>c</sup> Initial fluid fill size: 20 metric tons






# Fluids for **specialty applications**

In addition to our high-quality medium-temperature heat transfer fluids, Eastman offers a number of fluids developed for specialty applications.

## THERMINOL ADX-10

A low-viscosity, synthetic organic heat transfer fluid engineered for easy plant start-up (even at temperatures around  $-41^{\circ}\text{C}$ ); widely used in arctic regions and offshore applications; available in Europe, the Middle East, and Africa


Recommended bulk temperature:  $250^{\circ}\text{C}$  ( $480^{\circ}\text{F}$ )

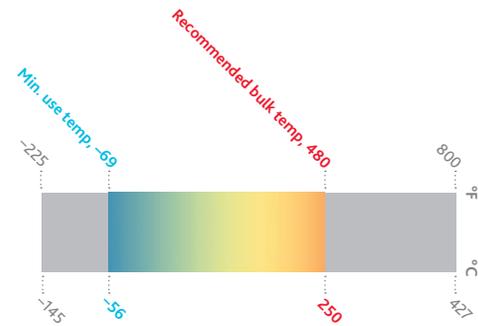

## THERMINOL 59

Featuring excellent low-temperature pumping characteristics and thermal stability for easy plant start-up (even at temperatures around  $-37^{\circ}\text{C}$ ); widely used in arctic regions and offshore applications

Recommended bulk temperature:  $315^{\circ}\text{C}$  ( $600^{\circ}\text{F}$ )

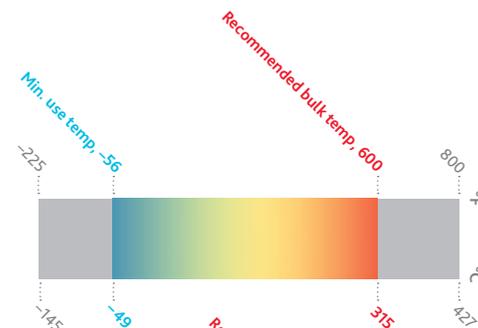


## MARLOTHERM LH

A low-viscosity, synthetic organic heat transfer medium for use in both the liquid and vapor phase for closed, forced-circulation heat transfer systems.

Recommended bulk temperature:  $330^{\circ}\text{C}$  ( $625^{\circ}\text{F}$ )


Max. extended use temperature:  $360^{\circ}\text{C}$  ( $680^{\circ}\text{F}$ )

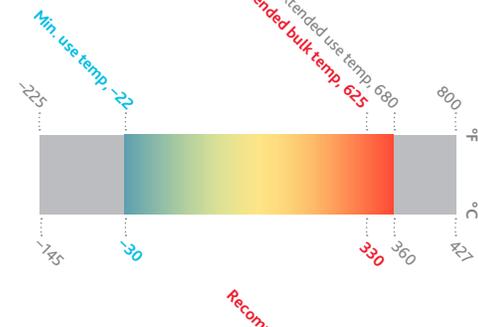

## THERMINOL XP

High-purity heat transfer fluid with NSF HT1 incidental food contact registration.

Recommended bulk temperature:  $315^{\circ}\text{C}$  ( $600^{\circ}\text{F}$ )

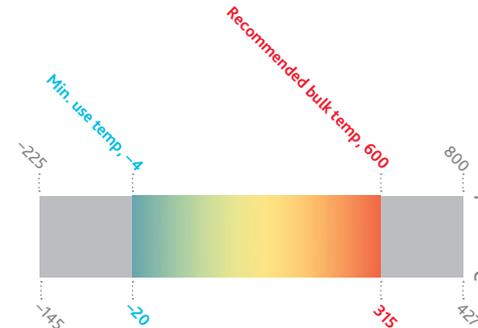

## The Eastman advantage



Whether on the factory floor or throughout a plant, a lot has to go right for industrial systems to work properly. And much of that can depend on the heat transfer fluid in the system. Engineers and maintenance managers trust Eastman's heat transfer fluids to help keep their processes up and running.

They trust Eastman to deliver the solutions they need when the heat is on. But it's not just about our products; it's our people, support services, and reputation that help ensure precise temperature control, building trust in complex systems.

## Global footprint



Eastman's heat transfer fluids are the top-selling synthetic fluids in the world, with manufacturing facilities and product supply on four continents. As one of the largest heat transfer fluid producers, Eastman has the infrastructure to deliver sizable quantities of synthetic fluids.

## Strong foundations



With a long, robust history of thermal fluid innovation, our high-performance fluids have a strong foundation of more than 50 years in the industry.

## Expert technical support



Our TLC Total Lifecycle Care® program is designed to support customers throughout a system's life cycle. This comprehensive program includes sample analysis, system design support, operational training, safety awareness training, start-up assistance, and flush and refill fluids.

### New construction

- Design support
- Operational training
- Start-up assistance

### Plant maintenance

- Fluid sample analysis—whether you are an Eastman customer or not
- Refill, top-up, and fluid trade-in options
- Flush fluid

## High-performance portfolio



Designed to provide precise temperature control in a variety of applications, Eastman's heat transfer fluids provide proven performance, superior product life, and worry-free fluid maintenance.

**Proven solutions.**  
**Precise temperature control.**  
**Peace of mind.**



For more information, visit [Therminol.com](http://Therminol.com) or [Marlotherm.com](http://Marlotherm.com).

**EASTMAN**  
The results of **insight**<sup>™</sup>

**Eastman Corporate Headquarters**  
P.O. Box 431  
Kingsport, TN 37662-5280 U.S.A.

U.S.A. and Canada, 800-EASTMAN (800-327-8626)  
Other locations, +(1) 423-229-2000

[www.eastman.com/locations](http://www.eastman.com/locations)

Although the information and recommendations set forth herein are presented in good faith, Eastman Chemical Company ("Eastman") and its subsidiaries make no representations or warranties as to the completeness or accuracy thereof. You must make your own determination of its suitability and completeness for your own use, for the protection of the environment, and for the health and safety of your employees and purchasers of your products. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment, or formulation in conflict with any patent, and we make no representations or warranties, express or implied, that the use thereof will not infringe any patent. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS AND NOTHING HEREIN WAIVES ANY OF THE SELLER'S CONDITIONS OF SALE.

Safety Data Sheets providing safety precautions that should be observed when handling and storing our products are available online or by request. You should obtain and review available material safety information before handling our products. If any materials mentioned are not our products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be observed.

© 2021 Eastman. Eastman brands referenced herein are trademarks of Eastman or one of its subsidiaries or are being used under license. The ® symbol denotes registered trademark status in the U.S.; marks may also be registered internationally. Non-Eastman brands referenced herein are trademarks of their respective owners.