

# Be the clear choice in biodiesel.

*Ensure the purity of your fuel brand with an effective and transparent antioxidant solution.*

Using Eastman BioExtend™ 30 high-performance antioxidant solution does more than help extend the shelf life of your product and revitalize your oxidized fuel. It also keeps your fuel true to its intended color by not imparting a noticeable change in hue. Biodiesel that looks cleaner and fresher denotes quality.

Your antioxidant should not darken your fuel, which could create doubts from your customers about meeting correct ASTM standards. A fuel that is too dark may be perceived as oxidized, which your customers know can lead to clogged fuel filters, damaging deposits, and residues in engines and fuel lines.

Regardless of your feedstock or process, BioExtend can help differentiate your product by maintaining the integrity of its intended color. In a side-by-side comparison, BioExtend imparts less color to biodiesel fuels than the product from a leading competitor at recommended levels (Figures 1 and 2). Which product would you rather have protecting your biodiesel?

Get extra mileage out of your markets. To request free oxidative stability testing or for more information, visit [www.EastmanBioExtend.com](http://www.EastmanBioExtend.com).

Figure 1. Distilled biodiesel

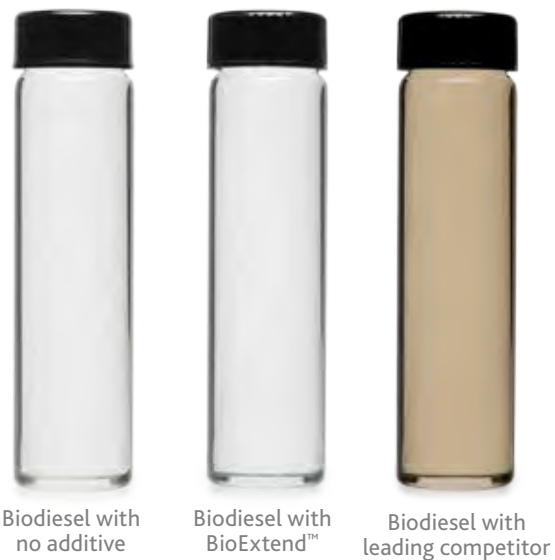


Figure 2. Undistilled biodiesel





The results of insight™

**Eastman Chemical Company  
Corporate Headquarters**

P.O. Box 431  
Kingsport, TN 37662-5280 U.S.A.

Telephone:  
U.S.A. and Canada, 800-EASTMAN (800-327-8626)  
Other Locations, (1) 423-229-2000  
Fax: (1) 423-229-1193

**Eastman Chemical Latin America**

9155 South Dadeland Blvd.  
Suite 1116  
Miami, FL 33156 U.S.A.

Telephone: (1) 305-671-2800  
Fax: (1) 305-671-2805

**Eastman Chemical B.V.**

Fascinatio Boulevard 602-614  
2909 VA Capelle aan den IJssel  
The Netherlands

Telephone: (31) 10 2402 111  
Fax: (31) 10 2402 100

**Eastman (Shanghai) Chemical  
Commercial Company Ltd.**

Building 3, Yaxin Science & Technology Park  
Lane 399 Shengxia Road,  
Pudong New District  
201210, Shanghai, P.R. China

Telephone: (86) 21 6120-8700  
Fax: (86) 21 5027-9229

**Eastman Chemical Japan Ltd.**

Anzen Building 16F  
1-6-6 Moto Akasaka  
Minato-ku, Tokyo 107-0051 Japan

Telephone: (81) 3-3475-9510  
Fax: (81) 3-3475-9515

**Eastman Chemical Asia Pacific Pte. Ltd.**

9 North Buona Vista Drive  
#05-01 The Metropolis Tower 1  
Singapore 138588

Telephone: (65) 6831-3100  
Fax: (65) 6732-4930

[www.EastmanBioExtend.com](http://www.EastmanBioExtend.com)

Although the information and recommendations set forth herein are presented in good faith, Eastman Chemical Company makes no representations or warranties as to the completeness or accuracy thereof. You must make your own determination of their suitability and completeness for your own use, for the protection of the environment, and for the health and safety of your employees and purchasers of your products. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment, or formulation in conflict with any patent, and we make no representations or warranties, express or implied, that the use thereof will not infringe any patent. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS AND NOTHING HEREIN WAIVES ANY OF THE SELLER'S CONDITIONS OF SALE.

Safety Data Sheets providing safety precautions that should be observed when handling and storing our products are available online or by request. You should obtain and review available material safety information before handling our products. If any materials mentioned are not our products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be observed.

© 2015 Eastman Chemical Company. Eastman, BioExtend, and The results of insight are trademarks of Eastman Chemical Company.