

**EASTMAN**

# Vibrant color. Wearer comfort.

Introducing Eastman Tritan™ copolyester, a polymer that makes a material difference for injection-molded frames.

- **Crystal clear.** Tritan copolyester provides superior clarity and colorability that few other resins can match. With Tritan, designers can achieve vibrant colors and deep tortoise-shell patterns—whether through molded-in color or secondary painting.
- **Excellent wearer comfort.** Frames made with Tritan have a premium feel with the solidity, glossy surface, and warm touch that consumers associate with high quality and comfort.
- **Outstanding durability.** With great chemical resistance that protects from the effects of sunscreens or skin oils, frames made with Tritan last longer than others that succumb to chemical attack.

## New possibilities in shatter-resistant lenses

Sunglass lens makers now have a reliable alternative to traditional materials. Tritan copolyester is a shatter-resistant polymer with many advantages over polycarbonate.

- Superior optics, including high transmittance and reduced haze
- Excellent chemical resistance
  - Naturally resistant to the chemicals commonly used in acetate frames that can cause lenses to crack
- Increased design freedom with reduced scrap
  - Less cracking during hole drilling to attach to half-frames
  - Easy to carve and shape into dramatic designs


## BPA free

In addition, Tritan is BPA free and not manufactured with any chemicals listed under California's Proposition 65.

TRITAN ADDS VALUE TO LENSES TOO.

See all the ways Eastman is prepared to be your total-solution source for lenses and frames at [eastman.com/ophthalmics](http://eastman.com/ophthalmics).

Eastman **TRITAN**™  
copolyester

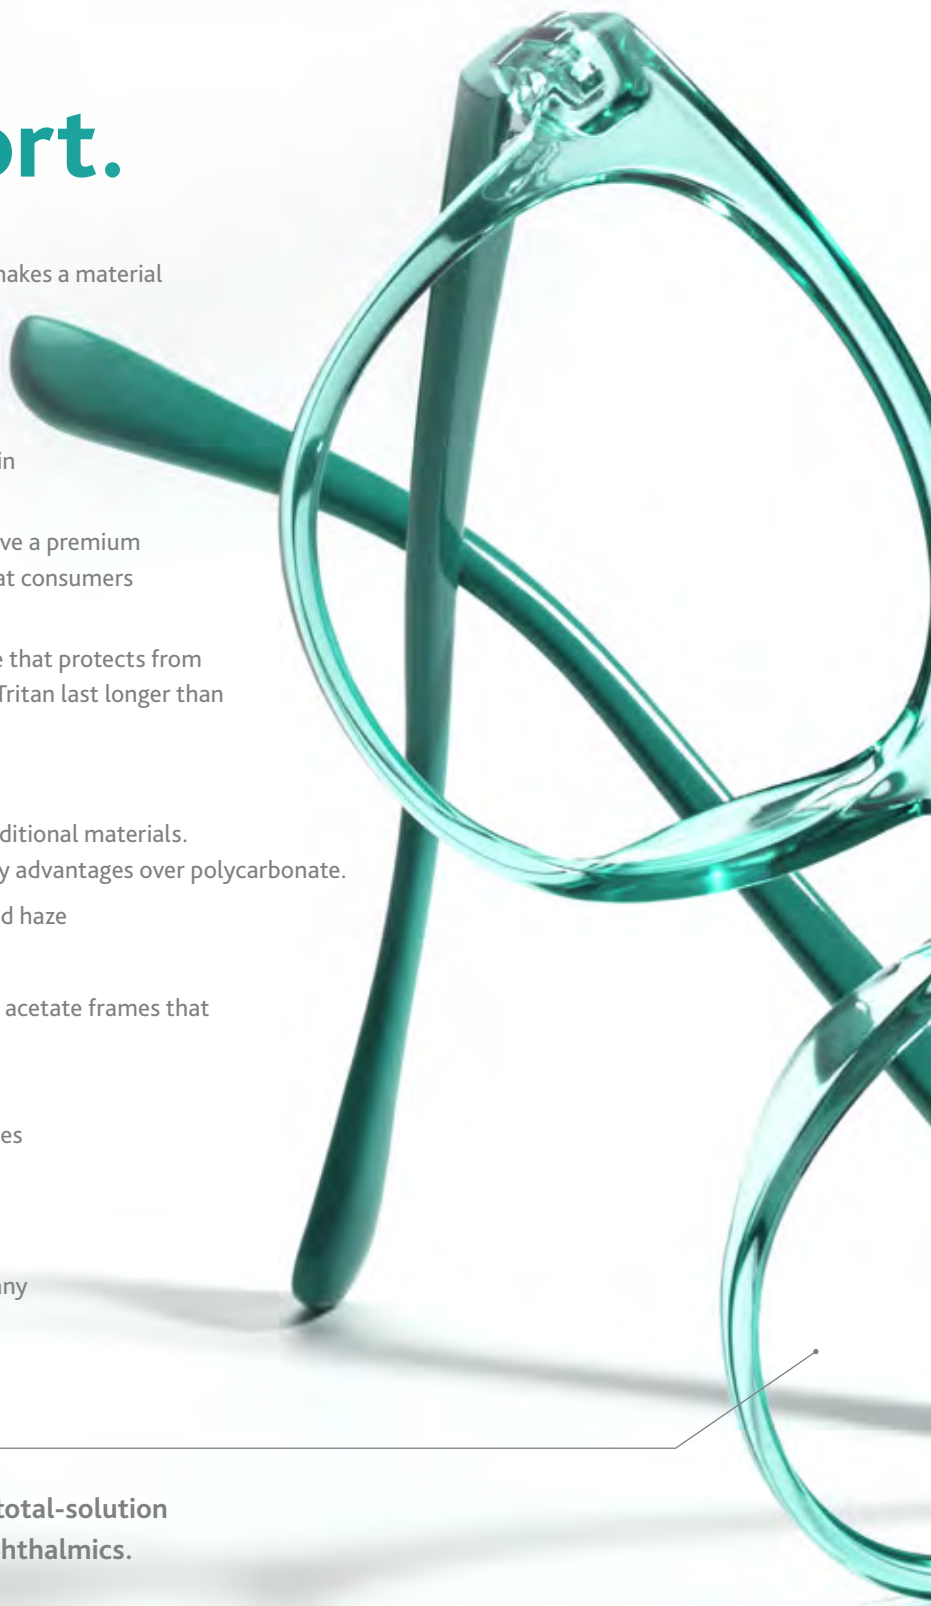



**Eastman Corporate Headquarters**  
P.O. Box 431  
Kingsport, TN 37662-5280 U.S.A.

U.S.A. and Canada, 800-EASTMAN (800-327-8626)  
Other Locations, +(1) 423-229-2000

[www.eastman.com/locations](http://www.eastman.com/locations)

Although the information and recommendations set forth herein are presented in good faith, Eastman Chemical Company ("Eastman") and its subsidiaries make no representations or warranties as to the completeness or accuracy thereof. You must make your own determination of its suitability and completeness for your own use, for the protection of the environment, and for the health and safety of your employees and purchasers of your products. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment, or formulation in conflict with any patent, and we make no representations or warranties, express or implied, that the use thereof will not infringe any patent. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS AND NOTHING HEREIN WAIVES ANY OF THE SELLER'S CONDITIONS OF SALE.

Safety Data Sheets providing safety precautions that should be observed when handling and storing our products are available online or by request. You should obtain and review available material safety information before handling our products. If any materials mentioned are not our products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be observed.

© 2020 Eastman. Eastman brands referenced herein are trademarks of Eastman or one of its subsidiaries or are being used under license. The ® symbol denotes registered trademark status in the U.S.; marks may also be registered internationally. Non-Eastman brands referenced herein are trademarks of their respective owners.